

bizhub 266

- □ Up to 26 pages per minute

✓ Functionality



- PCL
- Local/Network - USB - Mobile
- ColourBlack & white Scan-to-USBTWAIN Network - Scan-to-eMail - Scan-to-SMB



- Black & white



- Super G3 Fax – i-Fax – PC-Fax








Technology

| Emperon™ – print controller | Easily compatible with different users and IT environments through Konica Minolta's unified print technology | × |
|---------------------------------|--|----------|
| Simitri® HD – polymerised toner | Delivers high print quality and yet ensures reduced print spending as well as lower environmental impact | / |
| OpenAPI – solution platform | Server-based applications provide efficient workflows for the entire MFP fleet | X |
| i-Option – special feature | Offers extended scope and advanced MFP functionality in line with individual requirements | X |
| CSRC – remote service | Keeps productivity up with online monitoring of devices and consumables through the Konica Minolta service | / |
| IWS – panel customisation | Improved user-device interaction and enhanced productivity through full MFP panel customisation | X |

Option diagram

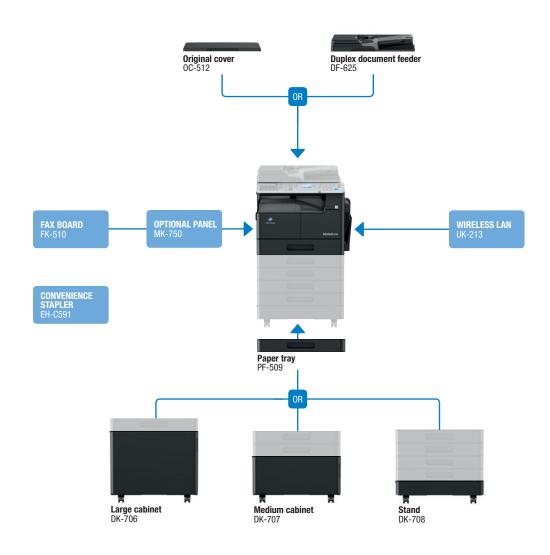

Finishing functionality



Descriptions

| bizhub 266 | Fully multifunctional A3 b/w device with 26 ppm; |
|------------------------|--|
| | standard copy, PCL print and colour scanning |
| | functionality; paper capacity of 350 sheets (incl. |
| | multi-bypass tray); duplex printing; 512 MB standard |
| | memory; Fast Ethernet and USB 2.0 interface |
| DF-625 Document feeder | Automatic document feeding of up to 70 sheets |
| OC-512 Original cover | Cover (instead of ADF) |
| PF-509 Paper tray | B5-A3; 250 sheets; 64-90 g/m²; up to four can be |
| | equipped |
| | |

| DK-706 Desk (large) | For 0x or 1x PF-509 |
|-----------------------------|---|
| DK-707 Desk (medium) | For 2x PF-509 |
| DK-708 Desk (small) | For 3x or 4x PF-509 |
| FK-510 Fax kit | Super G3 fax |
| MK-750 Optional panel | Needed for fax function and scan one-touch destinations |
| UK-213 Wireless LAN | Wireless LAN interface |
| EH-C591 Convenience stapler | Convenient stapling of up to 50 sheets per set |
| | |

Technical specifications

SYSTEM SPECIFICATIONS

| System memory | 512 MB |
|------------------------|---|
| Interface | 10/100-Base-T Ethernet; USB 2.0; |
| | Wi-Fi 802.11b/g/n (optional) |
| Network protocols | TCP/IP (IPv4/IPv6); SNMP; HTTP |
| Automatic document | Up to 70 originals; A5–A3; 35–128 g/m² simplex; |
| feeder (optional) | 50-128 g/m ² duplex; RADF |
| Printable paper size | A5–A3; customised paper sizes |
| Printable paper weight | 64–157 g/m² |
| Paper input capacity | 350 sheets/1,350 sheets |
| (standard/max) | |
| Paper tray input | 1x 250 sheets; A5–A3; custom sizes; 64–157 g/m ² |
| (standard) | |
| Paper tray input | 4x 250 sheets; B5–A3; custom sizes; 64–90 g/m² |
| (optional) | |
| Manual bypass | 100 sheets; A5–A3; custom sizes; 64–157 g/m ² |
| Automatic duplexing | A5-A3; 64-90 g/m ² |
| Finishing modes | Group; sort; crisscross |
| Output capacity | Max. 250 sheets |
| Copy/print volume | Rec. 8,000 pages |
| (monthly) | Max. 12,000 pages ¹ |
| Toner lifetime | Up to 12,000 pages |
| Power consumption | 220-240 V / 50/60 Hz; Less than 1.3 kWh |
| System dimensions | 627 x 570 x 458 mm (without options) |
| (W x D x H) | |
| System weight | Approx. 30.8 kg (without options) |
| | |

PRINTER SPECIFICATIONS

| Print resolution | 600 x 600 dpi |
|-------------------|--|
| | 1,200 x 600 dpi |
| Page description | PCL 6/5e |
| language | |
| Operating systems | Windows Vista (32/64) |
| | Windows 7 (32/64) |
| | Windows 8 (32/64) |
| | Windows 10 (32/64) |
| | Windows Server 2008 (32/64) |
| | Windows Server 2008 R2 |
| | Windows Server 2012 |
| | Windows Server 2012 R2 |
| | Linux; Citrix |
| Printer fonts | 53 PCL Latin |
| Print functions | N-up; watermark; secure print; image rotation; |
| | booklet function |
| Mobile Printing | PageScope Mobile (iOS/Android/Windows 10 Mobile) |
| | Mobile Pairing (Android/iOS) |

SCANNER SPECIFICATIONS

| Scan speed | Up to 46 ipm (300 dpi with optional document feeder)/ |
|-------------------|---|
| (mono/colour) | Up to 20 ipm (150 dpi with optional document feeder) |
| Scan resolution | Up to 600 x 600 dpi |
| Scan modes | Scan-to-eMail |
| | Scan-to-SMB |
| | Scan-to-FTP |
| | Scan-to-USB |
| | Local TWAIN and WIA scan |
| | Network TWAIN scan |
| File formats | PDF; JPEG; TIFF |
| Scan destinations | 250 speed dial destinations; LDAP support; |
| | 32 one-touch destinations (optional) |
| | |



COPIER SPECIFICATIONS

| Convine process | Laser |
|----------------------|--|
| Copying process | |
| Toner system | Simitri® HD polymerised toner |
| Copy/print speed A4 | Up to 26 ppm |
| Copy/print speed A3 | Up to 11 ppm |
| Autoduplex speed A4 | Up to 21 ppm |
| 1st copy out time A4 | 5.0 sec. |
| Warm-up time | Approx. 13 sec. ² |
| Copy resolution | 600 x 600 dpi |
| Gradation | 256 gradations |
| Multi-copy | 1–999 |
| Original format | A5–A3; custom sizes |
| Magnification | 25-400% in 0.1% steps; auto-zooming |
| Copy functions | 2in1; 4in1; book copy; ID copy; shift margin; erase; |
| | image rotation; program registration |

FAX SPECIFICATIONS

| For all and and | 0 00 (|
|------------------|--|
| Fax standard | Super G3 (optional) |
| Fax transmission | Analogue; i-Fax |
| Fax resolution | Standard; Fine; Super-fine |
| | Up to: 408 x 392 dpi |
| | (Super-fine via optional ADF) |
| Fax compression | MH; MR; MMR; JBIG |
| Fax modem | Up to 33.6 Kbps |
| Fax destinations | 32 one-touch destinations; 250 speed dial destinations |
| Fax functions | PC-Fax; polling; forward; phone book; redial |
| | |



| Accounting | Up to 50 user accounts |
|------------|----------------------------------|
| Software | PageScope Web Connection |
| | PageScope NetCare Device Manager |

- ¹ If the maximum volume is reached within a period of one year, then a maintenance cycle must be performed
- Warm-up time may vary depending on the operating environment and usage

- All specifications refer to A4-size paper of 80 g/m² quality.

 The support and availability of the listed specifications and functionalities varies depending on operating systems, applications and network protocols as well as network and system configurations.

 The stated life expectancy of each consumable is based on specific operating conditions such as page coverage for a particular page size (6% coverage of A4).

 The actual life of each consumable will vary depending on use and other printing variables including page coverage, page size, media type, continuous or intermittent printing, ambient temperature and humidity.
- Some of the product illustrations contain optional accessories.
- Specifications and accessories are based on the information available at the time of printing and are subject to change without notice.

 Konica Minolta does not warrant that any specifications mentioned will be error-free.
- All brand and product names may be registered trademarks or trademarks of their respective holders and are hereby acknowledged.























